


GUIDE LINEARI MODELLO SBR

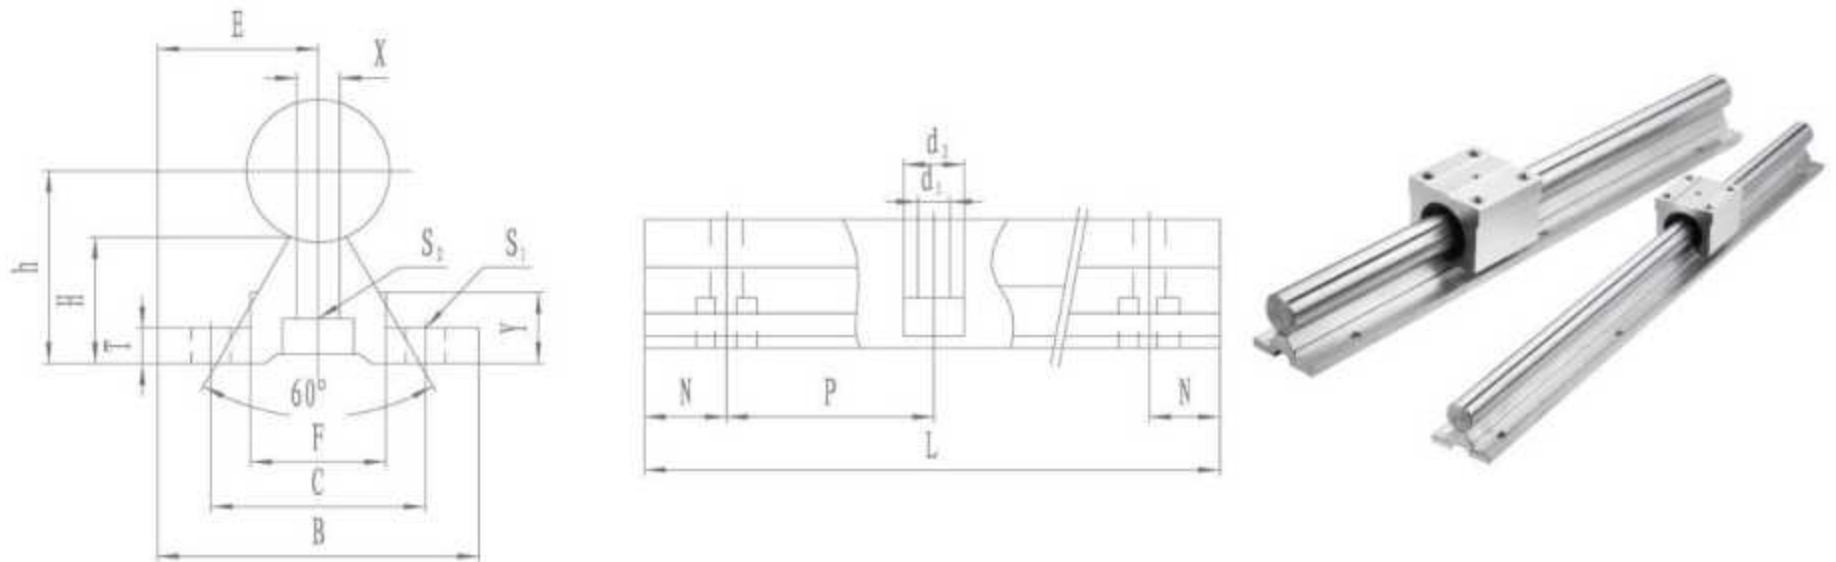

Part Number	Shaft Diameter	Main dimensions(mm)											Weight ^g
		E	h	B	H	T	F	X	Y	C	S1	S2 d1×d2×i	
SBR-C10	Φ10	16	18	32	13	4	12.5	4.7	8.5	22	Φ4.5	5×9×5	0.54
SBR-C12G	Φ12	15	22.5	30	17	4	12	4.7	12	22	Φ4.5	5×9×5	0.7
SBR-C12	Φ12	16	19	32	13	4	12.5	4.7	8.5	22	Φ4.5	5×9×5	0.7
SBR-C13	Φ13	16	19.5	32	13	4	12.5	4.7	8.5	22	Φ4.5	5×9×5	0.72
SBR-C16	Φ16	20	25	40	17.8	5	18.5	8	11.7	30	Φ5.5	5.5×9.5×5.4	1.0
SBR-C20	Φ20	22.5	27	45	17.7	5	19	8	10	30	Φ5.5	5.5×9.5×5.4	1.07
SBR-C25	Φ25	27.5	33	55	21	6	21.5	8	12	35	Φ6.6	6.6×11×6.5	1.5
SBR-C30	Φ30	30	37	60	22.8	7	26.5	10.3	13	40	Φ6.6	6.6×11×6.5	1.9
SBR-C35	Φ35	32.5	43	65	26.5	8	28	13	15.5	45	Φ9	9×14×8.6	2.45
SBR-C40	Φ40	37.5	48	75	29.5	9	38	15.5	17	55	Φ9	9×14×8.6	3.25
SBR-C50	Φ50	47.5	62	95	38.8	11	45	20	21	70	Φ11	11×17.5×10.8	5.26

Support Rail Stand Lengths and Dimensions

Part Number	SBR-C10	SBR-C12	SBR-C13	SBR-C16	SBR-C20	SBR-C25	SBR-C30	SBR-C35	SBR-C40	SBR-C50
Standard Length L	140	140	140	190	340	250	450	460	460	470
	240	240	240	340	640	450	850	660	660	670
	-	-	-	-	-	-	-	-	860	870
	340	340	340	640	940	850	1250	860	1060	1070
	440	440	440	940	1240	1250	1450	1060	1260	1270
N	20	20	20	20	20	25	25	30	30	35
P	100	100	100	150	150	200	200	200	200	200
	5000	5000	5000	6000	6000	6000	6000	6000	6000	6000

Exceeds the maximum length need docking, please show the drawing.

La lettera "N" corrisponde alla distanza bordo guida – centro primo foro.

Le due "N" saranno di uguale misura solo su richiesta.